

ANNUAL WIND DATA REPORT

Ipswich

June 1, 2003 – May 31, 2004

Prepared for

Town of Ipswich
Massachusetts

by

James F. Manwell
Anthony F. Ellis
Mohit Dua

December 12, 2004

Report template version 1.2

NOTICE AND ACKNOWLEDGEMENTS

This report was prepared by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst in the course of performing work sponsored by the Renewable Energy Trust (RET), as administered by the Massachusetts Technology Collaborative (MTC), pursuant to work order number 05-1. The opinions expressed in this report do not necessarily reflect those of MTC or the Commonwealth of Massachusetts, and reference to any specific product, service, process, or method does not constitute an implied or expressed recommendation or endorsement of it.

Further, MTC, the Commonwealth of Massachusetts, and RERL make no warranties or representations, expressed or implied, as to the fitness for particular purpose or merchantability of any product, apparatus, or service, or the usefulness, completeness, or accuracy of any processes, methods or other information contained, described, disclosed, or referred to in this report. MTC, the Commonwealth of Massachusetts, and the contractor make no representation that the use of any product, apparatus, process, method, or other information will not infringe privately owned rights and will assume no liability for any loss, injury, or damage directly or indirectly resulting from, or occurring in connection with, the use of information contained, described, disclosed, or referred to in this report.

TABLE OF CONTENTS

Table of Contents.....	1
Table of Figures.....	2
Executive Summary.....	3
SECTION 1 - Station Location.....	4
SECTION 2 - Instrumentation and Equipment.....	4
SECTION 3 - Data Collection and Maintenance.....	5
SECTION 4 - Significant Meteorological Events.....	5
SECTION 5 - Data Recovery and Validation.....	6
Test Definitions.....	6
Sensor Statistics.....	7
SECTION 6 - Data Summary.....	8
SECTION 7 - Graphs.....	10
Wind Speed Time Series.....	10
Wind Speed Distributions.....	11
Monthly Average Wind Speeds.....	11
Diurnal Average Wind Speeds.....	12
Turbulence Intensities.....	12
Wind Roses.....	13
APPENDIX A – Sensor Performance Report.....	14
Test Definitions.....	14
Sensor Statistics.....	15
APPENDIX B - Plot Data.....	16
Wind Speed Distribution Data.....	16
Monthly Average Wind Speed Data.....	17
Diurnal Average Wind Speed Data.....	18
Wind Rose Data.....	19

TABLE OF FIGURES

Figure 1 – Wind Speed Time Series, June 2003 – May 2004.....	10
Figure 2 – Wind Speed Distribution, June 2003 – May 2004	11
Figure 3 – Monthly Average Wind Speeds.....	11
Figure 4 – Diurnal Wind Speed, June 2003 – May 2004.....	12
Figure 5 – Turbulence Intensity vs Wind Speed, June 2003 – May 2004	12
Figure 6 - Wind Rose, June 2003 – May 2004	13

EXECUTIVE SUMMARY

All the work presented in this Annual Wind Data Report including installation and decommissioning of the meteorological tower and instrumentation, and the data analysis and reporting was performed by the Renewable Energy Research Laboratory (RERL) at the University of Massachusetts, Amherst.

Wind monitoring at Ipswich commenced on May 21, 2003. Wind speed and direction monitoring was performed at three heights 39m, 30m and 10m. This is the annual report from June 2003 through May 2004. The tower was taken down in June 2004. Data collection for the period has been good with 99.2% of the data points passing the quality assurance controls. Average wind speed for the year was found to be 5.14 m/s at 39m. Wind speeds were found to be lowest in the summer and highest in winter. While the predominant wind direction was SW in summer, for the major part of the year the wind blew from NNW. Graphs and figures in this report are for the 365-day period from June 2003 through May 2004. Sensor performance and data statistics are for the complete monitoring period from 21 May 2003 to 23 June 2004.

Additional information about interpreting the data presented in this report can be found in the Fact Sheet, "Interpreting Your Wind Resource Data", produced by RERL and the Massachusetts Technology Collaborative (MTC). This document is found through the RERL website:

http://www.ceere.org/rerl/about_wind/RERL_Fact_Sheet_6_Wind_resource_interpretation.pdf

SECTION 1 - Station Location

Ipswich is one of the oldest towns in the United States, located on the North Shore of Massachusetts, approximately 28 miles north of Boston. The town is 33 square miles and has a landscape that includes marshes, dunes and beaches, upland, forests, fields, and farmland. The monitoring tower is installed at the town transfer station (old landfill) on a small hill with salt marshes to the west and some trees to the north. The site is located at 42°42'58''N and 70°50'30''W. The figure below shows the site location.



SECTION 2 - Instrumentation and Equipment

The monitoring at the site is being done at three heights, 39m, 30m and 10m. The table below gives the description of the sensors and data collection equipment along with the number installed.

Description	39 m	30 m	10 m	Base
Maximum #40 Anemometer	2	2	1	-
NRG 200P Wind Vane	1	1	1	-
NRG 110S Temperature Sensor	-	-	-	1
Datalogger Type: 9300 Cellogger	-	-	-	1

SECTION 3 - Data Collection and Maintenance

Data collection during this period was good, with the redundant wind speed sensors installed to cover for the primary ones if they failed. The data is summarized below.

Date	Mean Wind Speed [m/s]	Max Wind Speed [m/s]	Turbulence Intensity []	Prevailing Wind Direction []
June 2003	4.22	19.07	0.22	SW
July 2003	4.28	11.07	0.21	W
August 2003	4.08	10.15	0.22	SW
September 2003	4.11	11.60	0.19	WNW
October 2003	5.21	17.75	0.19	WNW
November 2003	5.20	16.01	0.20	NW
December 2003	6.76	22.26	0.18	NNW
January 2004	5.81	15.43	0.21	NNW
February 2004	5.35	14.03	0.19	NNW
March 2004	5.94	17.57	0.19	NNW
April 2004	5.80	16.22	0.20	ENE
May 2004	4.90	12.62	0.22	WSW
Jun 03 – May 04	5.14	22.26	0.20	NNW

SECTION 4 - Significant Meteorological Events

The following significant meteorological events occurred during the monitoring year –

- On 15 October 2003 a windstorm hit most of the eastern US. Wind speeds up to 40 mph were reported from the site.
- In the middle of November 2003, there was a winter storm with gusts of 48 mph recorded in Boston.
- A winter storm was also reported on 29 November 2003.
- A major winter storm brought heavy snow and strong winds to Southern New England on December 5 and 6, 2003 dumping 1 to 3 feet of snow. A peak gust of 26 m/s was reported at Provincetown during the height of the storm. At the Ipswich site, average wind speeds over 20 m/s were recorded.

- A late season winter storm passing south east of New England brought heavy snowfall to most of Massachusetts on March 16-17. Snowfall of 5 to 10 inches was observed from the east slopes of Berkshires across central and eastern Massachusetts down to the part of the south coast.
- Heavy rain and winds were observed during the beginning of April.

SECTION 5 - Data Recovery and Validation

All raw wind data are subjected to a series of tests and filters to weed out data that are faulty or corrupted. Definitions of these quality assurance (QA) controls are given below under Test Definitions and Sensor Statistics. These control filters were designed to automate the quality control process and used many of the previous hand-worked data sets made at UMass to affect a suitable emulation. The gross percentage of data recovered (ratio of the number of raw data points received to data points expected) and net percentage (ratio of raw data points which passed all QA control tests to data points expected) are shown below. Most of the data lost was due to icing events.

Gross Data Recovered [%]	99.994
Net Data Recovered [%]	99.229

Test Definitions

All raw data were subjected to a series of validation tests, as described below. The sensors tested and the parameters specific to each sensor are given in the Sensor Performance Report which is included in Appendix A. Data which were flagged as invalid were not included in the statistics presented in this report.

MinMax Test: All sensors are expected to report data values within a range specified by the sensor and logger manufacturers. If a value falls outside this range, it is flagged as invalid. A data value from the sensor listed in Test Field 1 (TF1) is flagged if it is less than Factor 1 (F1) or greater than Factor 2. This test has been applied to the following sensors (as applicable): wind speed, wind speed standard deviation, wind direction, temperature, and solar insolation.

$$F1 > TF1 > F2$$

MinMaxT Test: This is a MinMax test for wind direction standard deviation with different ranges applied for high and low wind speeds. A wind direction standard deviation data value (TF1) is flagged either if it is less than Factor 1, if the wind speed (TF2) is less than Factor 4 and the wind direction standard deviation is greater than Factor 2, or if the wind speed is greater than or equal to Factor 4 and the wind direction standard deviation is greater than Factor 3.

$$(TF1 < F1)$$

$$\text{or } (TF2 < F4 \text{ and } TF1 > F2)$$

$$\text{or } (TF2 \geq F4 \text{ and } TF1 > F3)$$

Icing Test: An icing event occurs when ice collects on a sensor and degrades its performance. Icing events are characterized by the simultaneous measurements of near-zero standard deviation of wind direction, non-zero wind speed, and near- or below-freezing temperatures. Wind speed, wind speed standard deviation, wind direction, and wind direction standard deviation data values are flagged if the wind direction standard deviation (CF1) is less than or equal to Factor 1 (F1), the wind speed (TF1) is less than Factor 2 (F2), and the temperature (CF2) is less than Factor 3 (F3). To exit an icing event, the wind direction standard deviation must be greater than Factor 4.

$$CF1 \leq F1 \text{ and } TF1 < F2 \text{ and } CF2 < F3$$

CompareSensors Test: Where primary and redundant sensors are used, it is possible to determine when one of the sensors is not performing properly. For anemometers, poor performance is characterized by low data values. Therefore, if one sensor of the pair reports values significantly below the other, the low values are flagged. At low wind speeds (Test Fields 1 and 2 less than or equal to Factor 3) wind speed data are flagged if the absolute difference between the two wind speeds is greater than Factor 1. At high wind speeds (Test Fields 1 or 2 greater than Factor 3) wind speed data are flagged if the absolute value of the ratio of the two wind speeds is greater is greater than Factor 2.

$$[TF1 \leq F3 \text{ and } TF2 \leq F3 \text{ and } \text{abs}(TF1 - TF2) > F1]$$

$$\text{or } [(TF1 > F3 \text{ or } TF2 > F3) \text{ and } (\text{abs}(1 - TF1 / TF2) > F2 \text{ or } \text{abs}(1 - TF2 / TF1) > F2)]$$

Sensor Statistics

Expected Data Points: the total number of sample intervals between the start and end dates (inclusive).

Actual Data Points: the total number of data points recorded between the start and end dates.

% Data Recovered: the ratio of actual and expected data points (this is the *gross data recovered percentage*).

Hours Out of Range: total number of hours for which data were flagged according to MinMax and MinMaxT tests. These tests flag data which fall outside of an expected range.

Hours of Icing: total number of hours for which data were flagged according to Icing tests. This test uses the standard deviation of wind direction, air temperature, and wind speed to determine when sensor icing has occurred.

Hours of Fault: total number of hours for which data were flagged according to CompareSensors tests. These tests compare two sensors (e.g. primary and redundant anemometers installed at the same height) and flag data points where one sensor differs significantly from the other.

% Data Good: the filter results are subtracted from the gross data recovery percentage to yield the *net data recovered percentage*.

SECTION 6 - Data Summary

This report presents several types of wind data graphs in Section 7. Unless otherwise noted, each graph represents data for 1 year (12 months). The following graphs are included:

- Wind Speed Time Series – 10-minute average wind speeds are plotted against time as shown in Figure 1.
- Wind Speed Distribution – A histogram plot giving the percentage of time that the wind was at a given wind speed as shown in Figure 2. The most likely wind speed for the year is between 4 and 5 m/s.
- Monthly Average Wind Speeds – A plot of the monthly average wind speeds over a 12-month period as shown in Figure 3. This graph shows the trends in the wind speed from June 2003 through May 2004. The meteorological tower was installed in May 2003, therefore the average for May 2003 is not plotted. The wind speed remains fairly uniform from June to September. There is a rise in wind speed thereafter, with a maximum mean wind speed reported for December of 6.76 m/s. This is similar to the trend observed throughout New England, with the highest wind speeds reported in winter. January to April also sees fairly uniform wind speed between 5 and 6 m/s.
- Diurnal Average Wind Speeds – A plot of the average wind speed for each hour of the day as shown in Figure 4. For the year, the wind speed tends to peak in the afternoon, with highest wind speeds for the day reported between 1:00 PM and 3:00 PM. Lowest wind speeds are reported during morning between 7:00 AM and 8:00 AM.
- Turbulence Intensity – A plot of turbulence intensity as a function of wind speed as shown in Figure 5. Turbulence Intensity is calculated as the standard deviation of the wind speed divided by the wind speed and is a measure of the gustiness of a wind resource. Lower turbulence results in lower mechanical loads on a wind

turbine. Turbulence intensity is frequently in the range of 0.1 to 0.4. For this site average turbulence intensity for the year is 0.20.

- Wind Rose – A plot by compass direction showing the percentage of time that the wind comes from a given direction and the average wind speed in that direction as shown in Figure 6. For the year most of the time wind is blowing from the NW – NNW direction.

SECTION 7 - Graphs

Data for the wind speed histograms, monthly and diurnal average plots, and wind roses are included in Appendix B.

Wind Speed Time Series

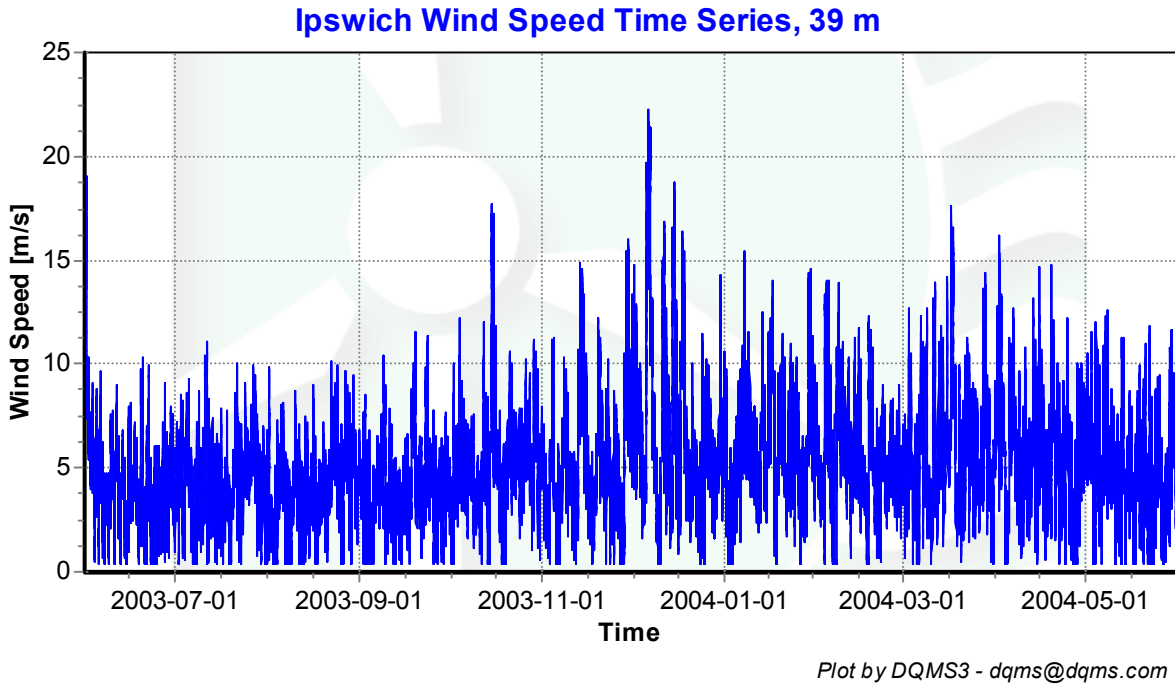


Figure 1 – Wind Speed Time Series, June 2003 – May 2004

Wind Speed Distributions

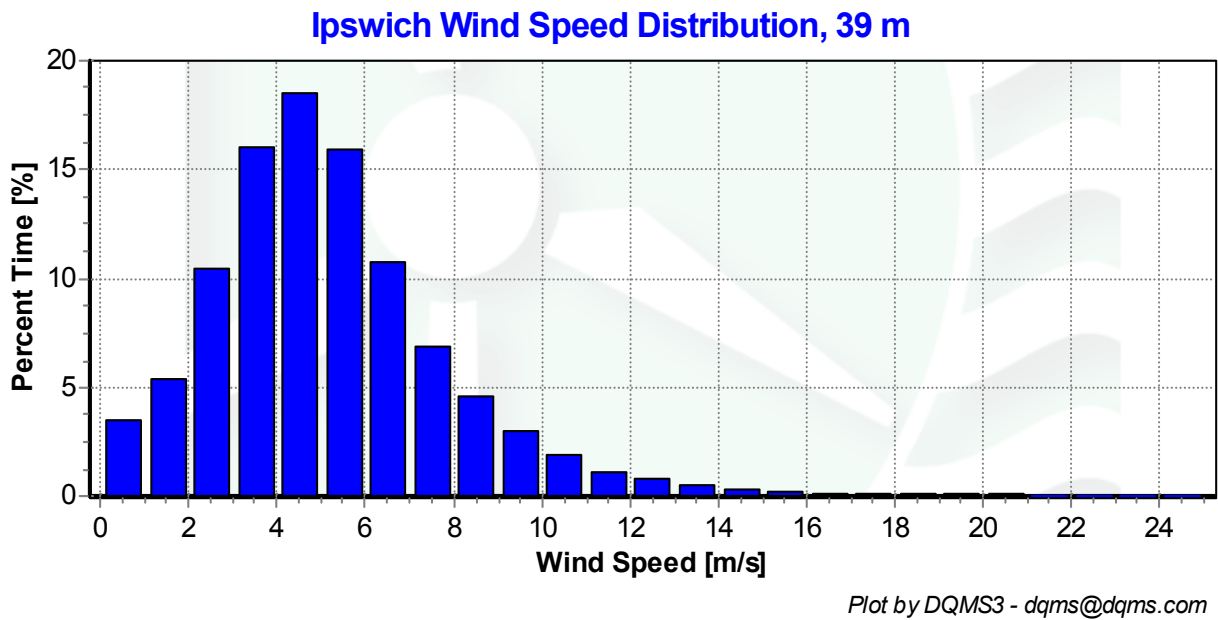


Figure 2 – Wind Speed Distribution, June 2003 – May 2004

Monthly Average Wind Speeds


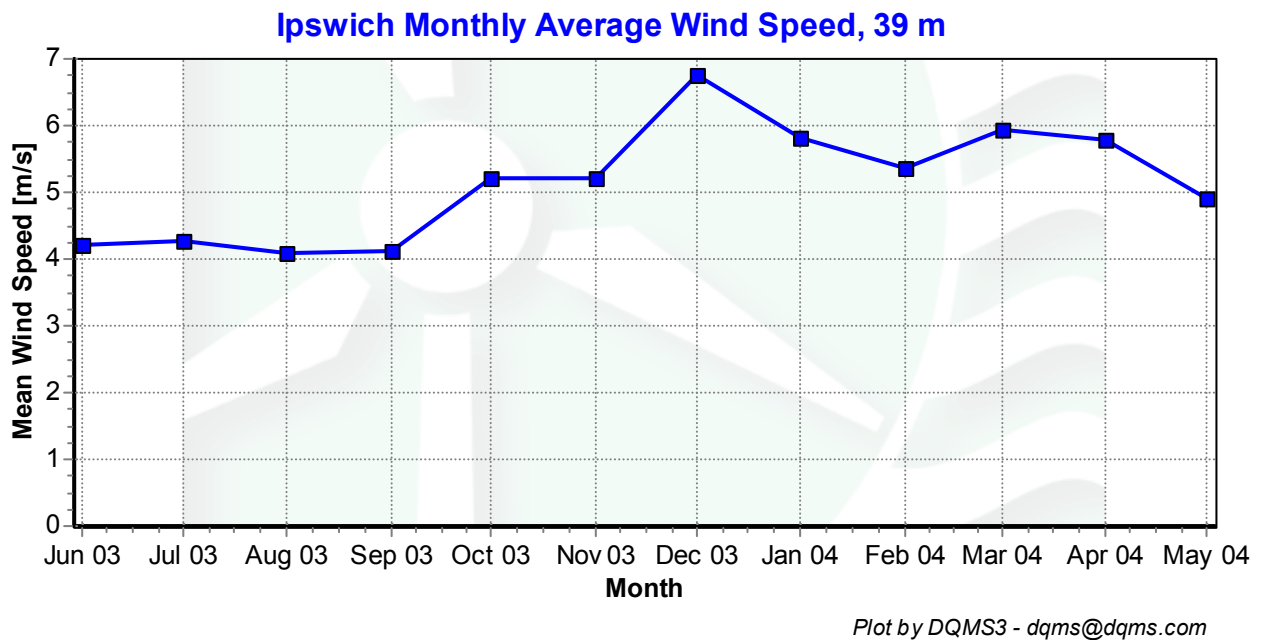


Figure 3 – Monthly Average Wind Speeds

Diurnal Average Wind Speeds

Ipswich Diurnal Average Wind Speed, 39 m

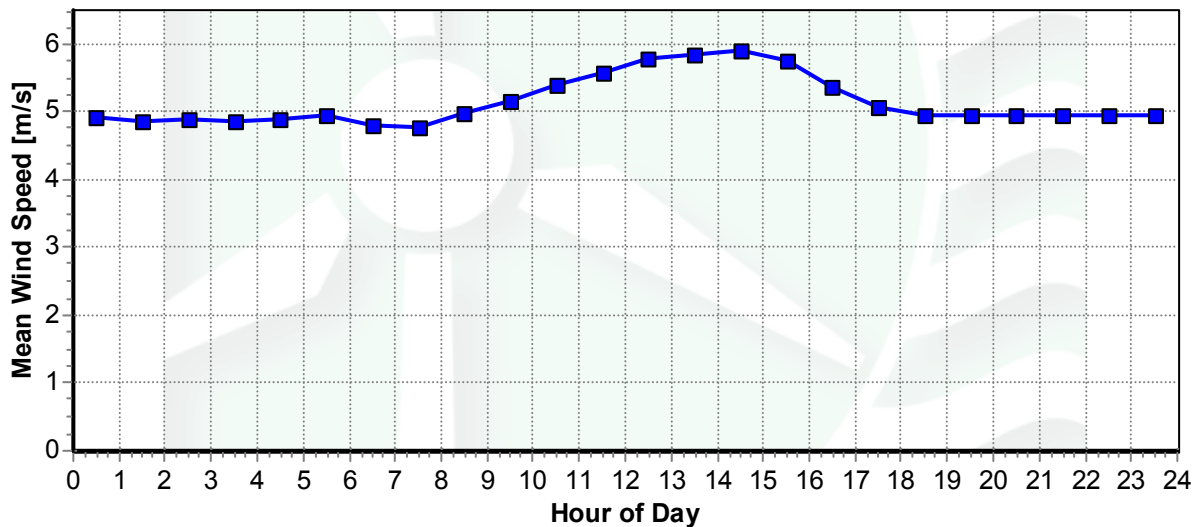


Plot by DQMS3 - dqms@dqms.com

Figure 4 – Diurnal Wind Speed, June 2003 – May 2004

Turbulence Intensities

Ipswich Turbulence Intensity, 39 m

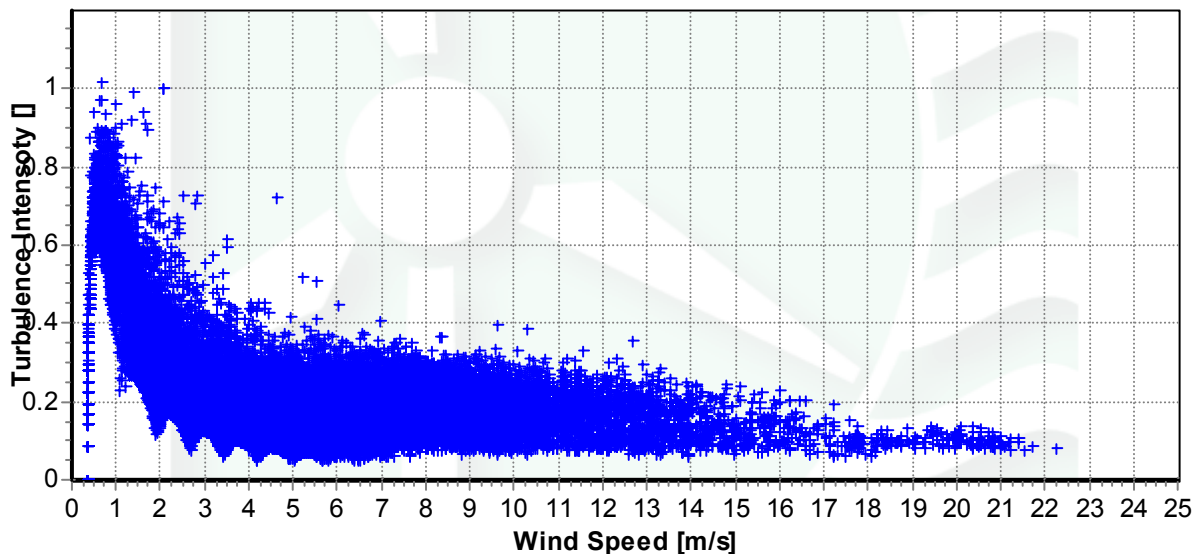


Plot by DQMS3 - dqms@dqms.com

Figure 5 – Turbulence Intensity vs Wind Speed, June 2003 – May 2004

Wind Roses

Ipswich Wind Rose, 39 m

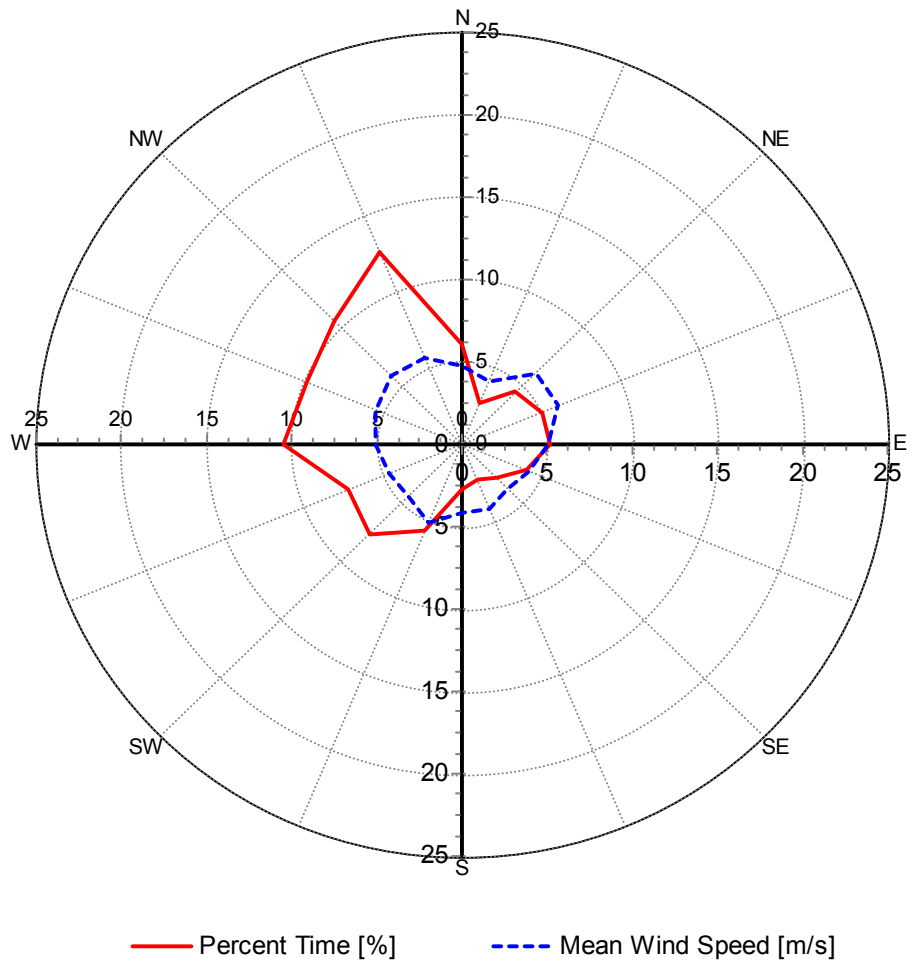

Plot by DQMS3 - dqms@dqms.com

Figure 6 - Wind Rose, June 2003 – May 2004

APPENDIX A – Sensor Performance Report

Test Definitions

Test Order	Test Field1	Test Field2	Test Field3	Calc Field1	Calc Field2	Calc Field3	TestType	Factor 1	Factor 2	Factor 3	Factor 4
1							TimeTest Insert				
2	Itmp2aDEGC						MinMax	-30	60		
3	Batt2aVDC						MinMax	10.5	15		
10	Anem39aMS						MinMax	0	90		
11	Anem39bbMS						MinMax	0	90		
12	Anem30aMS						MinMax	0	90		
13	Anem30bMS						MinMax	0	90		
14	Anem10aMS						MinMax	0	90		
15	Anem39yMS						MinMax	0	90		
16	Anem30yMS						MinMax	0	90		
20	AnemSD39aMS						MinMax	0	4		
21	AnemSD39bMS						MinMax	0	4		
22	AnemSD30aMS						MinMax	0	4		
23	AnemSD30bMS						MinMax	0	4		
24	AnemSD10aMS						MinMax	0	4		
25	AnemSD39yMS						MinMax	0	4		
26	AnemSD30yMS						MinMax	0	4		
30	Vane39aDEG						MinMax	0	359.9		
31	Vane30aDEG						MinMax	0	359.9		
32	Vane10aDEG						MinMax	0	359.9		
50	Turb39zNONE						MinMax	0	2		
51	Turb30zNONE						MinMax	0	2		
52	Turb10zNONE						MinMax	0	2		
60	Wshr0zNONE						MinMax	-100	100		
200	VaneSD39aDEG	Anem39yMS					MinMaxT	0	100	100	10
201	VaneSD30aDEG	Anem30yMS					MinMaxT	0	100	100	10
202	VaneSD10aDEG	Anem10aMS					MinMaxT	0	100	100	10
300	Anem39aMS	AnemSD39aMS	Vane39aDEG	VaneSD39aDEG	Itmp2aDEGC		Icing	0.5	1	2	
301	Anem39bMS	AnemSD39bMS	Vane39aDEG	VaneSD39aDEG	Itmp2aDEGC		Icing	0.5	1	2	
302	Anem30aMS	AnemSD30aMS	Vane30aDEG	VaneSD30aDEG	Itmp2aDEGC		Icing	0.5	1	2	
303	Anem30bMS	AnemSD30bMS	Vane30aDEG	VaneSD30aDEG	Itmp2aDEGC		Icing	0.5	1	2	
304	Anem10aMS	AnemSD10aMS	Vane10aDEG	VaneSD10aDEG	Itmp2aDEGC		Icing	0.5	1	2	
400	Anem39aMS	Anem39bMS					CompareSensor	1	0.25	3	0
401	Anem30aMS	Anem30bMS					CompareSensor	1	0.25	3	0

Sensor Statistics

Sensor	Expected Data Points	Actual Data Points	% Data Recovered	Hours Out of Range	Hours of Icing	Hours of Fault	% Data Good
ltmp2aDEGC	52705	52702	99.994	0	0	0	99.994
Batt2aVDC	52705	52702	99.994	0	0	0	99.994
Anem39aMS	52705	52702	99.994	0.167	75	23.333	98.873
AnemSD39aMS	52705	52702	99.994	0.167	75	23.167	98.875
Anem39bMS	52705	52702	99.994	0.167	95.333	0.5	98.901
AnemSD39bMS	52705	52702	99.994	0.167	95.333	0.5	98.901
Anem30aMS	52705	52702	99.994	0.167	92	10	98.831
AnemSD30aMS	52705	52702	99.994	0.167	92	9.833	98.833
Anem30bMS	52705	52702	99.994	0.167	98.833	12.833	98.721
AnemSD30bMS	52705	52702	99.994	0.167	98.833	6.667	98.791
Anem10aMS	52705	52701	99.992	0	62.333	0	99.283
AnemSD10aMS	52705	52701	99.992	0	62.333	0	99.283
Vane39aDEG	52705	52702	99.994	2	95.5	0	98.884
VaneSD39aDEG	52705	52702	99.994	2.667	95.5	0	98.877
Vane30aDEG	52705	52702	99.994	1.5	100.167	0	98.837
VaneSD30aDEG	52705	52702	99.994	1.667	100.167	0	98.835
Vane10aDEG	52705	52701	99.992	8.667	62.333	0	99.184
VaneSD10aDEG	52705	52701	99.992	10	62.333	0	99.169
Anem39yMS	52705	52702	99.994	0	0	0	99.994
Anem30yMS	52705	52702	99.994	0	0	0	99.994
AnemSD39yMS	52705	52702	99.994	0.167	0	0	99.992
AnemSD30yMS	52705	52702	99.994	0.167	0	0	99.992
Total	1159510	1159440	99.994	28.167	1363	86.833	99.229

APPENDIX B - Plot Data

Wind Speed Distribution Data

Bin Center Wind Speed [m/s]	June 2003 – May 2004 [%]
0.5	3.51
1.5	5.40
2.5	10.43
3.5	16.01
4.5	18.51
5.5	15.88
6.5	10.71
7.5	6.89
8.5	4.57
9.5	3.01
10.5	1.85
11.5	1.09
12.5	0.75
13.5	0.51
14.5	0.25
15.5	0.17
16.5	0.11
17.5	0.09
18.5	0.07
19.5	0.07
20.5	0.10
21.5	0.02
22.5	0.00
23.5	0.00
24.5	0.00

Monthly Average Wind Speed Data

Date	10 min Mean [m/s]
2003 June	4.22
July	4.28
Aug	4.08
Sept	4.11
Oct	5.21
Nov	5.20
Dec	6.76
2004 Jan	5.81
Feb	5.35
Mar	5.94
Apr	5.80
May	4.90
June 2003 – May 2004	5.14

Diurnal Average Wind Speed Data

Hour of Day	June 2003 – May 2004 [m/s]
0	4.91
1	4.86
2	4.89
3	4.85
4	4.88
5	4.94
6	4.8
7	4.78
8	4.98
9	5.16
10	5.39
11	5.58
12	5.77
13	5.84
14	5.89
15	5.75
16	5.37
17	5.06
18	4.95
19	4.94
20	4.96
21	4.95
22	4.93
23	4.96

Wind Rose Data

	June 2003 to May 2004	
Direction	Percent Time [%]	Mean Wind Speed [m/s]
N	6.05	4.72
NNE	2.70	4.18
NE	4.48	6.14
ENE	5.09	6.07
E	5.13	5.12
ESE	4.15	4.22
SE	2.87	3.80
SSE	2.37	4.28
S	2.78	4.21
SSW	5.70	5.18
SW	7.69	4.48
WSW	7.27	4.66
W	10.51	5.07
WNW	9.87	5.44
NW	10.67	5.87
NNW	12.67	5.72